

短時間で脱泡と混合作業が可能!! Enables degassing and mixing in short time

容器回転式型真空脱泡攪拌機

Container Rotating Compact Vacuum Degassing Mixer

ZEROMAZE



POINT
1

使用滑軌式真空罩作業效率提升!

Slide vacuum chamber improves work efficiency!

考量真空罩放置空間
所以設計出來之仕様!
減少使用空間, 提升作業效率。
Vacuum chamber that used to require storage is now a slide type! Reduces required space and significantly improves work efficiency.



POINT
2

容易操作的電子式面板仕様!
Simple, easy operation digital panel!

使用方便、操作性高的電子式面板, 減少設定錯誤的發生, 安心又便利。

Adopted easy-to see and user-friendly digital panel.

Reduces setup error and the work is easier and safer.



POINT
3

準備快速, 攪拌確實

真空到達時間減少25%以上, 大幅降低等待時間。

另外, 攪拌設定時間延長6倍以上。高黏度材料也可充分攪拌。

※與上一代產品之比較。
Comparison with our conventional model.


⊕用途

防水膠、接著劑等小批量脱泡、攪拌


For small lot degassing and mixing, such as sealant and adhesives.

■外型尺寸圖/單位名稱(單位mm)

Dimensions / Part Names (Unit:mm)

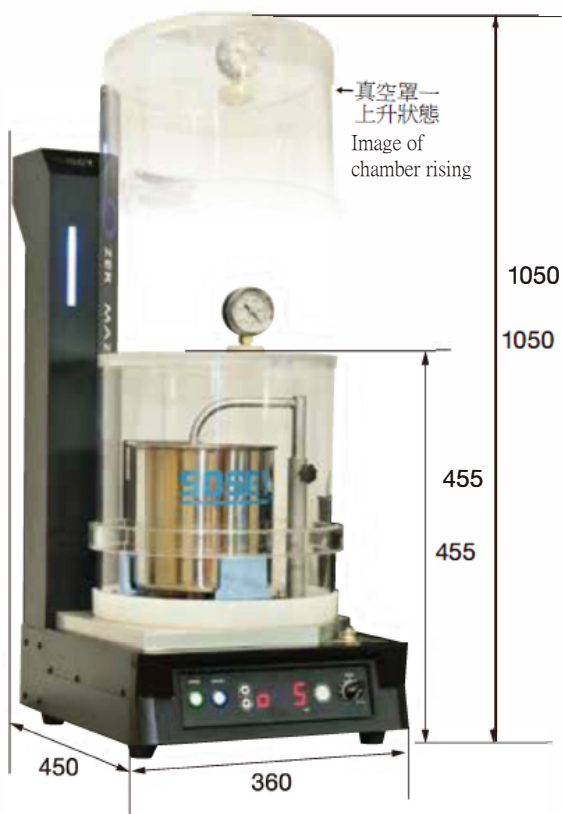

- ①升降吊桿
Lifting pole
- ②狀態表示燈
Status display lamp
- ③真空錶
Vacuum gauge
- ④壓克力真空罩
Acrylic vacuum chamber
- ⑤攪拌容器
Mixing container
- ⑥攪拌容器固定器
Holder for mixing container
- ⑦電源按鈕
Power button
- ⑧真空按鈕
Vacuum button
- ⑨定時設定按鈕
Timer setting button
- ⑩定時顯示
Timer display
- ⑪啟動/停止按鈕
Start/Stop button
- ⑫迴轉速度調整旋鈕
Rotation speed adjustment knob
- ⑬空馬達組(別置)
Vacuum pump unit

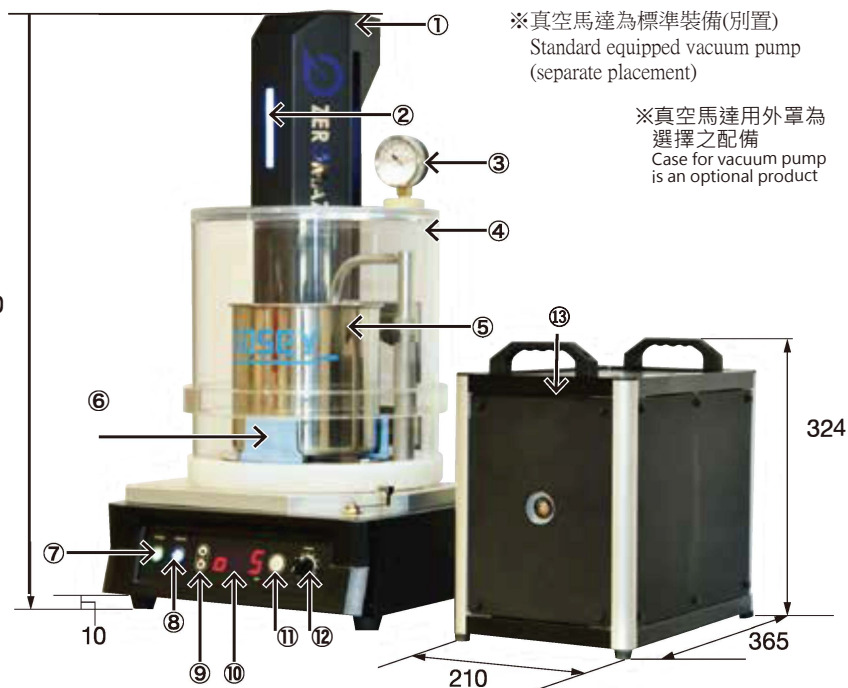

■標準規格Standard Specifications

可放置容器Attachable container	外徑φ80 to φ180 高220mm Outer diameter φ80 to φ180 Height 220 mm
攪拌棒Mixing vane	附SUS製攪拌棒1支(1L/2L/3L 選1) With one SUS vane (Select from 1L/2L/3L)
電源・電器容量 Power supply/ Electric capacity	100V・10A
攪拌馬達Mixing motor	100W
容器轉速・方向 Container rotation speed/direction	可變速(0-100rpm)・自動反轉 Variable speed (0-100 rpm) /Automatic reversed rotation
計時器Timer	電子式, 1-99分
重量Weight	28.1kg
真空馬達Vacuum pump	50Hz:50L/M1n-60Hz 60L/Min
真空錶Vacuum gauge	波燈管式-0.1MPa Bourdon tube type -0.1MPa

※機種規格、外觀等有能在無預告下變更。

※本機為非防爆、防水仕様。


※上述仕様之外皆為特殊仕様(選配), 若有需求請洽詢業務部門。

※Specifications and outside appearance may change without advanced notice.

※The device is not explosion- or water-proof.


※Special specifications other than those noted above are available (optional). Please inquire with our sales representative if you wish to add optional specifications.

■標準攪拌棒Standard Vane




1L用 FOR 1L

- ①全長250mm
Full length 250mm
- ②攪拌葉片部分87mm
Vane area 87mm
- ③攪拌葉片底座部分114mm
Vane bottom part 114mm



2L用 FOR 2L

- ①全長250mm
Full length 250mm
- ②攪拌葉片部分100mm
Vane area 100mm
- ③攪拌葉片底座部分124mm
Vane bottom part 124mm



3L用 FOR 3L

- ①全長250mm
Full length 250mm
- ②攪拌葉片部分111mm
Vane area 111mm
- ③攪拌葉片底座部分134mm
Vane bottom part 134mm



台灣索世工業有限公司
網址: <https://www.osey.com.tw>
TEL: 02-26989166
地址: 新北市汐止區新台五路一段79號6樓之9