

Used at construction sites and plants!!

# Container Rotating High-viscosity Mixer

## DERAMAZE



**POINT 1** Revolution in container holders!!  
Just pick up and place material drum for easy setup!!  
Easy to set up on carrying area approximately 30cm from the floor!!



**POINT 2** Easy to transport!!  
Large casters ensure stable transport!  
Enables easy transport over uneven surfaces.



**POINT 3** Possible to mix at different angles!!  
Easy to adjust angle by loosening screws!!



**Use**

- Mixing resin mortar
- Mixing of urethane, epoxy and silicone
- Preparation for high-viscosity grease

### HARD MIXER SERIES [DERAMAZE]

#### ■Dimensions / Part Names (Unit: mm)

- ① Tires for transport
- ② DERARAKU holder
- ③ Handle for mixing angle adjustment and transport
- ④ Mixing motor
- ⑤ Butterfly bolt for fixing mixing vane
- ⑥ Support pole for mixing vane
- ⑦ Power switch
- ⑧ Mainspring, 15 minutes timer (With operation lamp)
- ⑨ Mixing vane for normal rotation

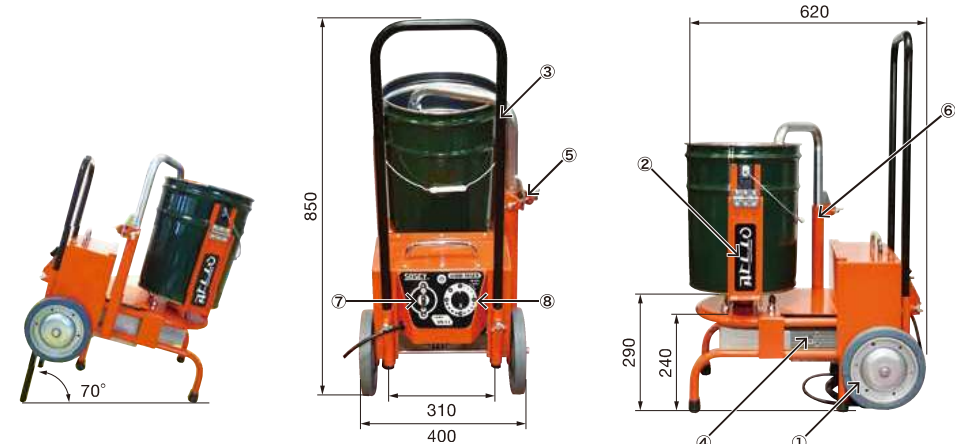

- Simple holder for container placement  
Adopted DERARAKU holder for easy carrying and placement of material drum!!  
Structure that holds the handle to enable straight or taper drums.
- Body with low center of gravity  
Realized stability with low center of gravity! Safe to use in a construction site with bad footing
- Features handle for transport and large casters  
Large casters ensure stable transport!  
Easy to carry over uneven surfaces. Able to load onto commercial vehicles!!
- Possible to mix at an angle  
Possible to mix with the unit at an angle by stretching up transport handle.



DERAMAZE site

#### ■Standard Specifications

|                                  |   |
|----------------------------------|---|
| Attachable container             | 20L pail (straight/taper)                                 |
| Mixing vane                      | With one iron vane (Select from straight can / taper can) |
| Power supply / Electric capacity | 100V · 10A  |
| Mixing motor                     | 400W  |
| Container rotation speed         | Fixed speed (50Hz:50rpm / 60Hz:60rpm)                     |
| direction                        | Automatic reversed rotation                               |
| Timer                            | Mainspring, 15 minutes (continuous operation possible)    |
| Weight                           | 43kg  |

※Specifications and outside appearance may change without advanced notice.  
 ※The device is not explosion- or water-proof.  
 ※Special specifications other than those noted above are available (optional).  
 Please inquire with our sales representative if you wish to add optional specifications.

#### ■Option



Mixing vane for normal rotation  
With Teflon® packing



Universal holder  
Corresponds to container sizes φ220 to φ300